



TYPICAL PENETRATION IN LOAD BEARING
THICKENING — PIPE CENTRAL



Stop reborr with Stop reborr with Stop reborr with sleeve = 800mm min Lop Stop reborr with sleeve = Additional HD12 rib borr Somm cover due to pipe penetration to terminate with 150 hook 120mm long to be installed in each direction if mesh is cut to sult pipe penetration

TYPICAL PENETRATION IN LOAD BEARING
THICKENING — PIPE NOT CENTRAL

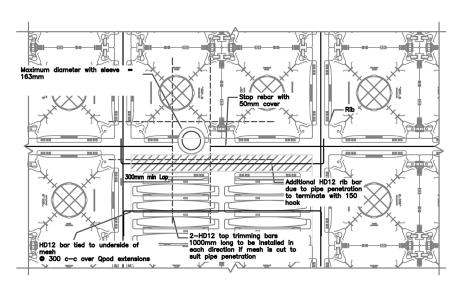

TYPICAL SERVICES THROUGH RIBS

TYPICAL SERVICES